

GAS FORM-C

CLIPPER HERMOD



«Industry leading provider of LPG and petrochemical tonnage»

BASED ON:
OCIMF/SIGTTO
Ship Information Questionnaire for Gas Carriers
2nd Edition 1998

CONTENTS

1.	SECTION A – GENERAL INFORMATION.....	4
1.1	PRINCIPAL SHIP PARTICULARS.....	5
1.2	HULL DIMENSIONS	7
1.3	IMMERSION	7
1.4	LOADED PARTICULARS	7
1.5	PARALLEL MID-BODY DIMENSIONS.....	8
1.6	BUNKER CAPACITIES.....	8
1.7	FUEL CONSUMPTION DETAILS.....	9
1.8	MAIN ENGINE PARTICULARS	9
1.9	AUXILIARY PLANT	9
1.10	POWER/SPEED INFORMATION.....	10
1.11	THRUSTERS	10
1.12	FRESH WATER.....	10
1.13	BALLAST CAPACITIES AND PUMPS	11
1.14	MOORING	11
1.15	NAVIGATIONAL EQUIPMENT	13
1.16	COMMUNICATIONS EQUIPMENT.....	14
2.	SECTION B – CARGO SYSTEMS.....	15
2.1	GENERAL INFORMATION.....	16
2.2	CARGO TANKS.....	16
2.3	CARGO TANK CAPACITIES.....	17
2.4	LOADING RATES.....	17
2.5	DISCHARGING – GENERAL	18
2.6	DISCHARGE PRESSURE.....	18
2.7	UNPUMPABLES.....	18
2.8	VAPORISING UNPUMPABLES	18
2.9	RELIQUEFACTION PLANT	19
2.11	CARGO TEMP. LOWERING CAPABILITY.....	19
2.12	INERT GAS.....	19
2.13	CARGO TANK INERTING/DE-INERTING	20
2.14	GAS FREEING TO FRESH AIR	20
2.15	CHANGING CARGO GRADES	20
2.16	DECK TANK CAPACITIES	21
2.17	PRE-LOADING CONDITIONS.....	21
2.18	VAPORISER.....	21
2.19	BLOWER.....	21
2.20	CARGO RE-HEATER	22

2.21	HYDRATE CONTROL	22
2.22	CARGO MEASUREMENT	22
2.23	CARGO SAMPLING	23
2.24	CARGO MANIFOLD	24
2.25	CARGO REDUCERS	25
2.26	CONNECTION TO SHORE FOR ESD/COM SYSTEMS	25
2.27	MANIFOLD DERRICK/CRANE.....	25
2.28	STORES HANDLING	25
3.	SECTION C – MACHINERY	27
3.11	NOX FACTOR TIER II.....	28
3.12	NOX FACTOR TIER III.....	29
3.13	EGCS/SCRUBBER.....	30
3.14	HEAT RECOVERY	30
3.15	OTHER RELEVANT TECHNICAL INFORMATION	30
3.16	ENVIRONMENTAL/PERFORMANCE TECHNOLOGIES INSTALLED.....	31
4.	APPENDIX/DRAWINGS.....	32
4.11	CARGO PUMPS	33
4.12	BOOSTER PUMPS.....	34
4.13	RE-HEATER CAPACITY, AMMONIA.....	35
4.14	RE-HEATER CAPACITY, PROPANE	36
4.15	MOORING DIAGRAM	37



Solvang ASA dates back to 1936. From very modest beginnings, the shipping company has now developed into one of the world's leading transporters of LPG and petrochemical gases. Solvang ASA has its headquarters in Stavanger, with offices in Oslo and the Philippines.

Solvang has a fleet of modern and efficient vessels - all built in the accordance with the most up to date specifications and fitted with new and efficient technology. Perhaps of greater importance than the modern technology is the way in which the vessels are operated – the people onboard. Good seamanship represents the very core of our business, and we place a firm focus on this area in the form of education, working on attitudes and training.

On every single sailing, we are required to demonstrate the full range of our experience and expertise. Our strength lies in reliable, high-quality deliveries. It is our goal to maintain a steady course towards the future, at the same time as making good use of the experience we have gained.

«Industry leading provider of LPG and petrochemical tonnage»

1. SECTION A – GENERAL INFORMATION

1.1 PRINCIPAL SHIP PARTICULARS

A1	PRINCIPAL SHIP PARTICULARS		CLIPPER HERMOD
1.0	Date Questionnaire Completed		28.04.2020
1.1	Name of vessel		Clipper Hermod
1.2	LR/IMO Number		IMO 9378163
1.3	Last Previous Name		N/A
1.3.1	Date of Name change		N/A
1.4	Second Last Name Change		N/A
1.4.1	Date of Name change		N/A
1.5	Third Last Name Change		N/A
1.5.1	Date of Name change		N/A
1.6	Fourth Last Name Change		N/A
1.6.1	Date of Name change		N/A
1.7	Flag		NIS
1.8	Port Of Registry		Stavanger
1.9	Official Number		
1.10	Call Sign		LAID6
1.11	VSAT		+44 203 1454 099
1.12	Fleet 77		+870 773 235 207
1.13	Fax		
1.14	Mini – M		+870 764 876 075
1.15	E-mail		clipper.hermod@solvangship.no
1.16	GSM Mobile		+47 904 04 519
1.17	SAT C		+580 425866910/425866915
1.18	Vessel's MMSI Number		258669000
1.19	Max tank pressure	UNIT	
1.19.1	(1) Pressurized	[bar g]	
1.19.2	(2) Semi- Refrigerated	[bar g]	4.5
1.19.3	(3) Refrigerated	[bar g]	
1.20	Minimum tank temperature	UNIT	
1.20.1	(1) Pressurized	[°C]	
1.20.2	(2) Semi- Refrigerated	[°C]	-104
1.20.3	(3) Refrigerated	[°C]	
A1	OWNERSHIP AND OPERATION		
1.21	REGISTERED OWNER		CLIPPER SHIPPING AS
1.22	Visitor's address		Strandkaien 36
1.22.1	City		N-4005 Stavanger
1.22.2	Country		Norway
1.23	Postal address		P.O. Box 90
1.23.1	City		N-4001 Stavanger
1.23.2	Country		Norway
1.24	Office Telephone Number		+47 51 84 84 00
1.25	Office Fax Number		+47 51 84 84 11
1.26	Office Telex Number		
1.27	Office e-mail Address		solvang-ethylene@solvangship.no
1.28	Number of Years Vessel Owned		11.5
1.29	NAME OF TECHNICAL OPERATOR		Solvang ASA
1.30	Visitor's address		Strandkaien 36
1.30.1	City		N-4005 Stavanger
1.30.2	Country		Norway
1.31	Postal address		P.O. Box 90
1.31.1	City		N-4001 Stavanger
1.31.2	Country		Norway
1.32	Office Telephone Number		(+47) 51 84 84 00

1.33	Office Fax Number	(+47) 51 84 84 11
1.34	Office Telex Number	
1.35	Office e-mail Address	solvang-ethylene@solvangship.no
1.36	Number of Years as vessel Operator	11.5
1.37	Total number of vessels, Operator	27
1.38	COMMERCIAL OPERATOR	Solvang ASA
1.39	Visitor's address	Haakon VII's gt 6
1.39.1	City	N-0121 Oslo
1.39.2	Country	Norway
1.40	Postal address	P.O.Box 1737 Vika
1.40.1	City	N-0121 Oslo
1.40.2	Country	Norway
1.41	Office Telephone Number	(+47) 22 47 19 50
1.42	Office e-mail Address	chartering@solvangship.no
1.42.1	Office e-mail Address 2	operation@solvangship.no
1.43	Number of Years as vessel Operator	11.5
1.44	Builder	Meyer Werft
1.45	Name of Yard Vessel Built At	Jos. Meier, Papenburg/Rostock
1.46	Hull Number	S 682
1.47	Date Keel Laid	06.09.2006
1.48	Date Launched	24.06.2008
1.49	Date Delivered	14.10.2008
1.50	Date of Completion of Major Hull Changes (If Any)	N/A
1.51	If Changes were made, specify changes and yard	N/A
A1	CLASSIFICATION	UNIT
1.52	Classification Society	[Text]
1.53	Class Notation	[Text]
1.53.1	Cont.	[Text]
1.53.2	Cont.	[Text]
1.54	If Class Society Changed, Name of Previous society	[Text]
1.55	If Class Society Changed, Date of Change	[Date]
1.56	Built in accordance with Regulations:	Approval recieved
1.56.1	IMO	[Yes/No]
1.56.2	USCG	[Yes/No]
1.56.3	RINA	[Yes/No]
1.56.4	Other	[Yes/No]
1.57	IMO Certification Certificate of Fitness	Approval recieved
1.57.1	IGC	[Yes/No]
1.57.2	A328	[Yes/No]
1.57.3	A329	[Yes/No]
1.57.4	Letter of compliance	[Yes/No]
1.57.5	Issued By	[Text]
1.58	Unattended Machinery Space certificate	[Yes/No]
A1	TONNAGES	UNIT
1.59	Nett Registered Tonnage	[NT]
1.60	Gross Tonnage	[GT]
1.61	Suez Canal Tonnage	
1.61.1	Net Tonnage	[NT]
1.61.2	Gross Tonnage	[GT]
1.62	Panama Canal Tonnage	
1.62.1	Net Tonnage	[NT]
1.62.2	Gross Tonnage	[GT]

1.2 HULL DIMENSIONS

A2	HULL DIMENSIONS	UNIT	CLIPPER HERMOD
2.1	Length Overall	[m]	155.0
2.2	Length Between Perpendiculars	[m]	147.7
2.3	Distance Bow to Bridge	[m]	124.3
2.4	Distance Bridge Front to Mid-Point Manifold	[m]	49.5
2.5	Distance Bow to Mid-Point Manifold	[m]	74.8
2.6	Extreme Breadth	[m]	22.7
2.7	Extreme Depth	[m]	15.0
2.8	Summer Draught	[m]	10.6
2.9	Corresponding Deadweight	[ton]	18861.0
2.10	Light Displacement/weight	[ton]	7534.0
2.11	Loaded Displacement (Summer)	[ton]	26395.0
2.12	Cargo Tank Cubic Capacity (100% full)	[m3]	17131.0
2.13	Distance from Keel to Highest Point (With mast down)	[m]	39.3
2.14	Air Draught normal ballast (With mast down)	[m]	33.0


1.3 IMMERSION

A3	IMMERSION	UNIT	CLIPPER HERMOD
3.1	Normal Ballast Draught	[TPC]	25.60
3.1.1	Draught	[m]	5.7
3.2	Loaded Draught	[TPC]	30
3.2.1	Draught	[m]	10.4

1.4 LOADED PARTICULARS

A4	LOADED PARTICULARS	UNIT	CLIPPER HERMOD		
4.1	Cargo:		LPG	VCM	Ethylene
4.2	Density:	[ton/m3]	0.598	0.97	0.569
4.3	Cargo	[ton]	9740.00	16288	9538
4.4	Bunkers	[ton]	1506.10	1506.1	1506.1
4.5	DO	[ton]			
4.6	Fresh Water	[ton]	200.00	200	200
4.7	Stores/Spares	[ton]	20	20	20
4.8	Lube Oil	[ton]	36	36	36
4.9	Ballast	[ton]			426
4.10	Deadweight Const.	[ton]	175	175.00	175.00
4.11	Draught – Forward	[m]	7.76	10.77	8.21
4.11.1	Aft	[m]	8.37	9.98	8.1
4.11.2	Equiv.	[m]	8.07	10.77	8.15

1.5 PARALLEL MID-BODY DIMENSIONS

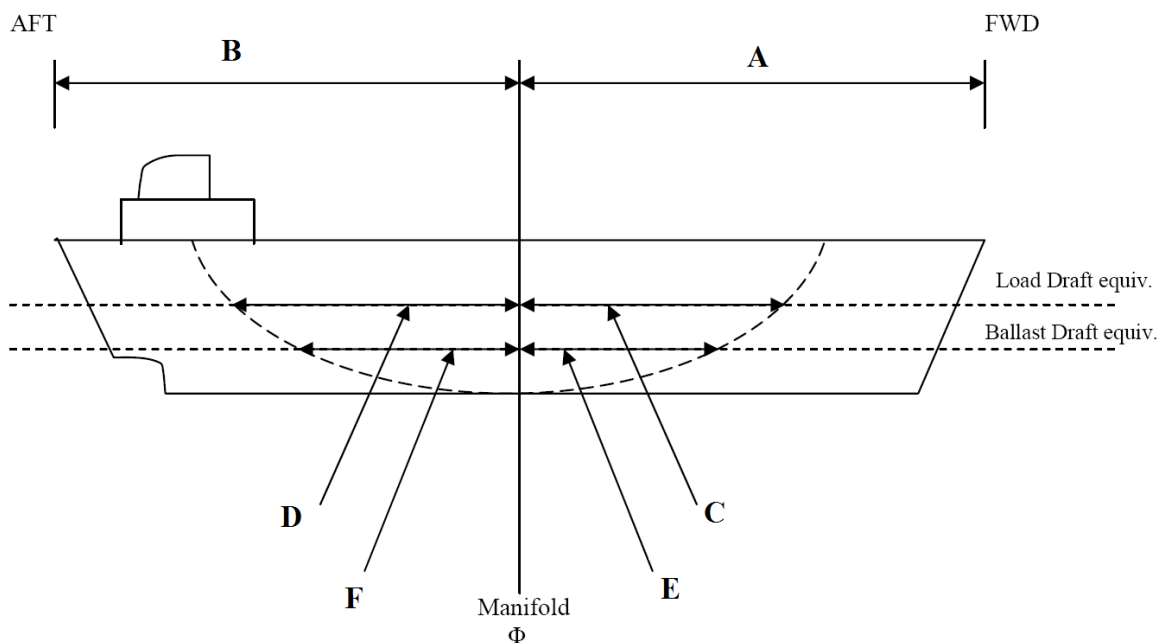

A5	PARALLEL MID-BODY DIMENSIONS	UNIT	CLIPPER HERMOD
5.1	A Manifold to FWD	[m]	74.70
5.2	B Manifold to AFT	[m]	80.2
5.3	Loaded draft equiv-		
5.3.1	C Manifold to FWD side tangent line	[m]	35
5.3.2	D Manifold to AFT side tangent line	[m]	41.05
5.4	Ballast draft equiv.		
5.4.1	E Manifold to FWD	[m]	25.1
5.4.2	F Manifold to AFT	[m]	31.3

1.6 BUNKER CAPACITIES

A6	BUNKER CAPACITIES	UNIT	CLIPPER HERMOD
6.1	HFO	[Grade]	IFO 380 (Standard)
6.1.1	Capacity @ 100 %	[m3]	1321.29
6.2	LSHFO	[Grade]	N/A
6.2.1	Capacity @ 100 %	[m3]	N/A
6.3	Diesel Oil	[Grade]	D0
6.3.1	Capacity @ 100 %	[m3]	219.49

1.7 FUEL CONSUMPTION DETAILS

Average speed and consumption, based on max force 4 Beaufort and 15% Sea Margin.

Vessel use mainly HFO for all consumers. DO/GO for INCN and when Rules & Regulations demands it for other consumers

A7	FUEL CONSUMPTION DETAILS	UNIT	CLIPPER HERMOD
7.1	LOADED CONDITION		*About
7.2	Average speed over 12 months	[kn]	16.0
7.3	Average consumption, Main engine	[ton/day]	27.0
7.4	Consumption, AUX		
7.4.1	LPG	[ton/day]	3-6
7.4.2	Ethylene	[ton/day]	5-10
7.5	Average consumption, AUX		
7.5.1	LPG	[ton/day]	4
7.5.2	Ethylene	[ton/day]	7.5
7.6	BALLAST CONDITION		
7.7	Average speed over 12 months	[kn]	16.0
7.8	Average consumption, Main engine	[ton/day]	25.0
7.9	Average consumption, AUX	[ton/day]	5
7.10	PORT/IDLE		
7.11	Average consumption, AUX, Loading	[ton/day]	9
7.12	Average consumption, AUX, Discharging	[ton/day]	6
7.13	Average consumption, AUX, Idle	[ton/day]	4
7.14	Average consumption, Boiler (depending on weather)	[ton/day]	2,0-3,0
7.15	OTHER		
7.16	INCN (When operating) - MDO/MGO	[ton/day]	0.2
7.17	IGG-plant (When operating)	[ton/day]	N/A
7.18	ME CONSUMPTION GRAPH/KNOTS		LOADED BALLAST
7.18.1	18	[ton/day]	42.5 41.0
7.18.2	17	[ton/day]	34.0 33.0
7.18.3	16	[ton/day]	27.0 25.0
7.18.4	15	[ton/day]	24.0 23.0
7.18.5	14	[ton/day]	22.5 22.0

**Consumption of AUX will increase with 0,2-1,0 MT/24h when systems for exhaust gas cleaning is running, depending on sulfur content in fuel oil, load of engines, alkalinity, degree of cleaning, etc

1.8 MAIN ENGINE PARTICULARS

A8	MAIN ENGINE PARTICULARS	UNIT	CLIPPER HERMOD
8.1	Main Engine Make and Type	[Text]	Wärtsilä SULZER 6RT-FLEX 50
8.2	No of Units	Pcs	1
8.3	Maximum Continuous Rating (MCR)	[kW]	9720
8.3.1	RPM	[RPM]	124
8.4	Total Available Power	kW	9 720
8.5	Normal service Power	kW	8 748

1.9 AUXILIARY PLANT

A9	AUXILIARY PLANT	UNIT	CLIPPER HERMOD
9.1	Make and Type of Auxiliary Generators	[Text]	Wärtsilä AUXPAC 975 W6L20
9.2	Main Generators	[Pcs]	
9.2.1	No of Units	[Pcs]	3
9.2.2	Maximum Generator Output per Unit	[kW]	975
9.3	Generators, other	[Yes/No]	NO

9.3.1	No of Units	[Pcs]	N/A
9.3.2	Maximum Generator Output per Unit	[kW]	N/A
9.4	Shaft Generator	[kW]	N/A
9.5	Total Available Power	[kW]	2925
9.6	Emergency Generator	[kW]	295
9.7	Emergency Fire Pump	[Text]	
9.7.1	Type	[Text]	Centrifugal
9.7.2	Delivery Pressure	[Bar]	8
9.7.3	Motive Power	[Text]	Electrical
9.7.4	If Electrical, Indicate Power Required in kW	[kW]	36
9.8	Steering Gear Type		Rolls-Royce Marine / Frydenbo
9.8.1	kW to Steer the Vessel with One Pump Unit	[kW]	35

1.10 POWER/SPEED INFORMATION

A10	POWER/SPEED INFORMATION	UNIT	CLIPPER HERMOD
10.1	Trial Data		
10.1.1	NCR	[kW]	8 641
10.1.2	MCR	[kW]	9 720
10.1.3	Speed	[kn]	19.23
10.1.4	Draught	[m]	5.33
10.2	Normal Service Speed		
10.2.1	NCR	[kW]	8748
10.2.2	MCR	[kW]	9720
10.2.3	Speed	[kn]	16,5/18,0
10.2.4	Draught	[m]	5.7

1.11 THRUSTERS

A11	THRUSTERS	UNIT	CLIPPER HERMOD
11.1	Make and Type	[Text]	Wärtsila
11.2	No. Installed	[Pcs]	1.00
11.3	Location and Rated Bollard Pull or kW output	[kW]	BOW/900

1.12 FRESH WATER

A12	FRESH WATER	UNIT	CLIPPER HERMOD
12.1	Capacity of Distilled Tanks	[ton]	N/A
12.2	Capacity of F/D.W. Ts	[ton]	203.00
12.3	Daily Consumption	[ton/day]	7.00
12.4	Daily Evaporator Output	[ton/day]	15.00

1.13 BALLAST CAPACITIES AND PUMPS

A13	BALLAST CAPACITIES AND PUMPS	UNIT	CLIPPER HERMOD	
13.1	Tank Capacities		Capacity [m3]	Tanks [Pcs]
13.1.1	Forepeak	[Col]	378.50	1
13.1.2	Wing or Side tanks	[Col]	2419.7	10
13.1.3	Double bottom tanks	[Col]	2006.8	12
13.1.4	Aft Peak	[Col]	135	1
13.1.5	Other	[Col]		
13.1.6	Total	[Col]	4 939.80	24
13.2	Ballast Pumps			
13.2.1	Capacity per pump	[m3/h]	240	
13.2.2	Model	[Text]	Allweiler AG – MI 125-250	
13.2.3	Type	[Text]	Electric	
13.2.4	Setting	[Text]	Vertical Centrifugal	
13.3	No of Pumps	[Pcs]	2	
13.4	Total Capacity	[m3/h]	480	
13.5	Location	[Text]	Engine Room	
13.6	Control Location	[Text]	Bridge, CCR, Engine Room	

1.14 MOORING

A14	MOORING EQUIPMENT	UNIT	CLIPPER HERMOD			
14.1	Mooring wires (On drums)		FWD	FWD DECK	AFT DECK	POOP
14.1.1	Number	[Pcs]				
14.1.2	Diameter	[mm]				
14.1.3	Length	[m]				
14.1.4	Maximum Breaking Load	[ton]				
14.2	Mooring wire tails		FWD	FWD DECK	AFT DECK	POOP
14.2.1	Number	[Pcs]				
14.2.2	Type	[Text]				
14.2.3	Diameter	[mm]				
14.2.4	Length	[m]				
14.2.5	Maximum Breaking Load	[ton]				
14.3	Mooring ropes (On drums)		FWD	FWD DECK	AFT DECK	POOP
14.3.1	Number	[Pcs]	4	2		4
14.3.2	Type	[Text]	B5 YARN&HP	B5 YARN&HP		B5 YARN&HP
14.3.3	Diameter	[mm]	48	48		48
14.3.4	Length	[m]	220	220		220
14.3.5	Maximum Breaking Load	[ton]	50	50		50
14.4	Mooring winches		FWD	FWD DECK	AFT DECK	POOP
14.4.1	Number	[Pcs]	2	1		2
14.4.2	[S]ingle/[D]ouble drums	[S/D]	Double	Double		Double
14.4.3	Split drums	[Yes/No]	YES	YES		YES
14.4.4	Motive power	[Text]	Hydraulic	Hydraulic		Hydraulic
14.4.5	Heaving power	[ton]	12.7	12.7		12.7
14.4.6	Brake capacity	[ton]	36.7	36.7		36.7
14.4.7	Hauling speed	[m/s]	0.25	0.25		0.25
14.5	Wires/ropes not on drums		WIRES	ROPES	EM'GENCY	
14.5.1	Number	[Pcs]		10/2/1		
14.5.2	Type	[Text]		B5 YARN&HP		
14.5.3	Diameter	[mm]		48/56/72		
14.5.4	Length	[m]		220/110/220		
14.5.5	Maximum Breaking Load	[ton]		52/68/113		

A14	ANCHORS AND WINDLASSES	UNIT	CLIPPER HERMOD
14.5.1	Windlass Motive Power (e.g. Steam, Hydraulic)	[Text]	Hydraulic
14.5.2	Hauling Power	[ton]	16
14.5.3	Brake Holding Power	[ton]	46
14.5.4	Anchor Type	[Text]	High Holding Power
14.5.5	Weight	[kg]	4 200
14.5.6	Is Spare Carried	[Yes/No]	YES
14.5.7	Cable Diameter	[mm]	58
14.5.8	No of Shackles Port	[Pcs]	10
14.5.9	No of Shackles Starboard	[Pcs]	11
14.6	TOWING EQUIPMENT		
14.6.1	Is Ship fitted with a Towing Bracket AFT(drum)	[Yes/No]	NO
14.6.2	If Yes, state SWL	[ton]	N/A
14.6.3	Is Towing Chain provided	[Yes/No]	NO
14.6.4	Dimensions of Towing Wire - Diameter	[mm]	
14.6.5	Length	[m]	
14.7	Windage on Ballast Draught		
14.7.1	End-on	[m2]	125
14.7.2	Lateral	[m2]	2080

Mooring diagram is provided in the appendix.

1.15 NAVIGATIONAL EQUIPMENT

A15	NAVIGATIONAL EQUIPMENT	UNIT	CLIPPER HERMOD
15.1	Magnetic Compass	[Yes/No]	YES
15.2	Off Course Alarm – Magnetic	[Yes/No]	YES
15.3	Gyro Compass	[Yes/No]	YES
15.3.1	Specify number	[Pcs]	2
15.4	Off Course Alarm – Gyro	[Yes/No]	YES
15.5	Bridge Repeaters	[Yes/No]	YES
15.5.1	Specify Number	[Pcs]	1
15.6	Radar 3 GHz	[Yes/No]	YES
15.7	Radar 9 GHz	[Yes/No]	YES
15.8	Are Radars Gyro Stabilized	[Yes/No]	YES
15.9	Radar Plotting Equipment	[Yes/No]	YES
15.10	ARPA	[Yes/No]	YES
15.11	ECDIS (Electric Display and Information System)	[Yes/No]	YES
15.11.1	Make/Type	[Text]	Kongsberg
15.12	Depth Echo Sounder with Recorder	[Yes/No]	YES
15.13	Depth Echo Sounder without Recorder	[Yes/No]	NO
15.14	Speed/Distance Indicator	[Yes/No]	YES
15.15	Doppler Log	[Yes/No]	NO
15.16	Speed of Approach Doppler	[Yes/No]	YES
15.17	Rudder Angle Indicator	[Yes/No]	YES
15.18	Rudder Angle Indicator on Each Bridge Wing	[Yes/No]	YES
15.19	R.P.M Indicator	[Yes/No]	YES
15.20	R.P.M Indicator on Each Bridge Wing	[Yes/No]	YES
15.21	Controllable Propeller Pitch Indicator	[Yes/No]	YES
15.22	Thruster (s) indicator	[Yes/No]	YES
15.23	Rate of turn Indicator	[Yes/No]	YES
15.24	Radio Direction Finder	[Yes/No]	NO
15.25	NAVTEX Receiver	[Yes/No]	YES
15.26	GPS	[Yes/No]	YES
15.27	Transit SATNAV	[Yes/No]	NO
15.28	DECCA navigator	[Yes/No]	NO
15.29	Omega	[Yes/No]	NO
15.30	Loran C	[Yes/No]	NO
15.31	Weather Route System	[Yes/No]	YES
15.32	Sextant(s)	[Yes/No]	YES
15.33	Signal Lamp ALDIS	[Yes/No]	YES
15.34	Anemometer	[Yes/No]	YES
15.35	Engine Order Recorder	[Yes/No]	YES
15.36	Course Recorder	[Yes/No]	NO
15.37	Steering motor controls controls fitted on bridge wings	[Yes/No]	YES
15.38	Is bridge Equipped with a “Dead Man” Alarm Equipment	[Yes/No]	YES
15.39	What chart outfit coverage is provided	[Yes/No]	Provided, used when necessary
15.39.1	Worldwide	[Yes/No]	YES
15.39.2	Limited	[Yes/No]	
15.39.3	If Limited Please Indicate	[Text]	
15.40	Formal Chart Correction System in use	[Yes/No]	YES
15.41	Electronic Chart System in use	[Yes/No]	YES

1.16 COMMUNICATIONS EQUIPMENT

A16	COMMUNICATIONS EQUIPMENT	UNIT	CLIPPER HERMOD
16.1	Main Transmitted Including Radio Telephone Distress Frequency	[Yes/No]	YES
16.2	Main Receiver Including Radio Telephone Distress Frequency	[Yes/No]	YES
16.3	Radio Telephone Distress Frequency Watch Receiver	[Yes/No]	YES
16.4	Main Radio Antenna	[Yes/No]	YES
16.5	Reserve Radio Antenna	[Yes/No]	NO
16.6	Main and Reserve Installations Electrically Separate and Independent	[Yes/No]	YES
16.7	2182 kHz Bridge auto Alarm	[Yes/No]	YES
16.8	Alarm Signal Generating Device	[Yes/No]	YES
16.9	VHF Radio (s)	[Yes/No]	YES
16.9.1	Specify Number	[Pcs]	3
16.10	Portable VHF/UHF Radios	[Yes/No]	YES
16.10.1	Specify Type and Number	[Pcs]	3/4(OFE)
16.11	Are Sets Intrinsically Safe	[Yes/No]	YES
16.12	Inmarsat Satellite System	[Yes/No]	YES
16.13	Specify System Type A, B, C, F or VSAT	[Text]	C, F, VSAT
16.14	Is the ship equipped as per GMDSS Requirements	[Yes/No]	YES
16.15	If Yes, which area of operation is vessel certified to operate in	[Text]	A1, A2, A3
16.15.1	EPIRB	[Yes/No]	YES
16.15.2	SARTS	[Yes/No]	YES
16.16	Emergency Lifeboat Transceiver	[Yes/No]	Incl. EPIRB
16.17	At least Three Survival craft Two-way Radio Telephone Apparatus	[Yes/No]	YES
16.18	Full Set of Publications	[Yes/No]	YES

2. SECTION B – CARGO SYSTEMS

2.1 GENERAL INFORMATION

B1	CARGO - GENERAL INFORMATION		CLIPPER HERMOD	
1.1	List Products Which the Ship is Certified to Carry			
1.1.1	1.	Ethylene		
1.1.2	2.	Ethane		
1.1.3	3.	Ammonia		
1.1.4	4.	Butadiene		
1.1.5	5.	i-Butane,		
1.1.6	6.	Butane-propane		
1.1.7	7.	Butylene		
1.1.8	8.	Propane		
1.1.9	9.	Propylene		
1.1.10	10.	VCM		
1.1.11	11.	Methyl Chloride		
1.1.12	12.	Acetaldehyde		
1.1.13	13.	Dimethylamine		
1.1.14	14.	Diethyl Ether		
1.1.15	15.	Ethylene/Propylene Oxide		
1.1.16	16.	Isopropylamine		
1.1.17	17.	Ethyl Chloride		
1.1.18	18.	Propylene Oxide		
1.1.19	19.	Vinyl Ethyl Ether		
1.1.20	20.	Ethylamine		
1.1.21	21.	n-Butane		
1.1.22	22.	Pentane		
1.1.23	23.	Isoprene		
1.1.24	24.	Mixed C4		
1.2	Transport and Carriage Condition		UNIT	
1.3	Minimum Allowable Tank Temperature		[Celsius]	-104
1.3.1	Maximum Allowable Tank Pressure (Seagoing setting)		[bar g]	4.5
1.3.2	Maximum Allowable Tank Pressure (Harbour setting)		[bar g]	4.5
1.4	Grades which can be Loaded or Discharged Simultaneously		[Pcs]	2
1.5	Grades which can be Transported Simultaneously		[Pcs]	2
1.6	Number of Products Re-liquefied Simultaneously		[Pcs]	2
1.7	State Natural Tank Segregations (Possible combinations)		UNIT	
1.7.1	1.		[Tank]	1 & 2+3
1.7.2	2.		[Tank]	2 & 1+3
1.7.3	3.		[Tank]	3 & 1+2

2.2 CARGO TANKS

B2	CARGO TANKS	UNIT	CLIPPER HERMOD
2.1	Cargo Tanks		
2.1.1	Type	[Text]	Independent type C
2.1.2	Material	[Text]	NV 5Ni
2.2	Maximum Allowable Relief Valve setting	[bar g]	4.5
2.3	Safety Valve Set Pressure – If Variable Give Range of Pilot Valves		
2.3.1	Seagoing setting	[bar g]	4.7
2.3.2	Harbour setting	[bar g]	4.7
2.4	Maximum Vacuum	[bar g]	-0.3
2.5	Maximum Cargo Density (98% full)	[kg/m3]	972
2.6	Maximum Rate of Cool-Down	[C/h]	10

2.7	State any Limitations regarding Partially Filled Tanks	[Text]	None
2.7.1	Cont.	[Text]	
2.8	State Allowable Combinations of Filled and Empty Tanks	[Text]	All
2.8.1	Cont.	[Text]	

2.3 CARGO TANK CAPACITIES

B3	CARGO TANK CAPACITIES	UNIT	CLIPPER HERMOD				
3.1	Capacity	Tank	1	2	3	4	Total
3.1.1	100 %	[m3]	5516	5613	6004		17133
3.1.2	98 %	[m3]	5406	5501	5884		16790
3.2	Cargo						
3.2.1	iso-butane	[ton]	3211	3267	3495		9973
3.2.2	Propane	[ton]	3135	3190	3413		9738
3.2.3	Butadiene	[ton]	3519	3581	3830		10931
3.2.4	Propylene	[ton]	3297	3355	3589		10242
3.2.5	Ammonia	[ton]	3676	3741	4001		11417
3.2.6	Butylene/Butenes	[ton]	3211	3267	3495		9973
3.2.7	n-butane	[ton]	3249	3306	3536		10091
3.2.8	Ethylene	[ton]	3076	3130	3348		9554

- Cargoes may not be applicable for vessel. Check which cargoes the vessel is certified to carry.

2.4 LOADING RATES

VR = Vapour Return, W/O VPR = Without Vapour Return

B4	LOADING RATES		UNIT	CLIPPER HERMOD			
				REFRIGERATED		PRESSURE	
4.1	Cargo		[m3/h]	VR	W/O VR	VR	W/O VR
4.1.1	1	Propylene	[m3/h]	1400	1200		
4.1.2	2	Propane	[m3/h]	1400	1200		
4.1.3	3	Ammonia	[m3/h]	1400	1200		
4.1.4	4	Butane	[m3/h]	1400	1200		
4.1.5	5	Butadiene	[m3/h]	1400	1200		
4.1.6	6	Ethylene	[m3/h]	1400	1200		
4.1.7	7	Propylene Oxide	[m3/h]	1400	1200		
4.1.8	8	VCM	[m3/h]	1400	1200		
4.1.9	9	Ethylene (-80°C)	[m3/h]				175
4.1.10	10	Ethylene (-95°C)	[m3/h]				650
4.1.11	11	Propane (+10°C)	[m3/h]				425
4.1.12	12	Propane (+5°C)	[m3/h]				500
4.1.13	13	Propane (0°C)	[m3/h]				600
4.1.14	14	Propane (-10°C)	[m3/h]				860
4.1.15	15	Propane (-20°C)	[m3/h]				1050
4.1.16	16	Ammonia (10°C)	[m3/h]				450
4.1.17	17	Ammonia (0°C)	[m3/h]				900
4.1.18	18	Ammonia (-10°C)	[m3/h]				1000
4.1.19	19	Propylene (10°C)	[m3/h]				375
4.1.20	20	Propylene (5°C)	[m3/h]				450

2.5 DISCHARGING – GENERAL

Pumping curves for cargo main pumps and booster pumps are given in the appendix.

B5	DISCHARGING – GENERAL	UNIT	CLIPPER HERMOD
5.1	Cargo Pumps	[Text]	Deepwell
5.1.1	Type of Pumps	[Text]	Centrifugal
5.1.2	Number per Tank	[Pcs]	2
5.1.3	Rate (per pump)	[m3/h]	200
5.1.4	Delivery Head	[mlc]	140
5.1.5	Maximum Density	[kg/m3]	972
5.2	Booster Pumps		
5.2.1	Type of Pumps	[Text]	Centrifugal
5.2.2	Number	[Pcs]	2
5.2.3	Rate (per pump)	[m3/h]	300
5.2.4	Delivery Head	[mlc]	120
5.2.5	Maximum Density	[kg/m3]	972

2.6 DISCHARGE PRESSURE

B6	DISCHARGE PERFORMANCE	UNIT	CLIPPER HERMOD
6.1	Fully Refrigerated, Full Cargo Discharge Times (all pumps):		VR W/O VR
6.1.1	Manifold Back Pressure (1 kg/cm2) x	[h]	18 18
6.1.2	Manifold Back Pressure (5 kg/cm2) x	[h]	24 24
6.1.3	Manifold Back Pressure (10 kg/cm2) ^	[h]	48 48
6.2	Pressurized, Full Cargo Discharge Times (all pumps):		VR W/O VR
6.2.1	Manifold Back Pressure (1 kg/cm2) ^	[h]	36 36
6.2.2	Manifold Back Pressure (5 kg/cm2) ^	[h]	48 48
6.2.3	Manifold Back Pressure (10 kg/cm2) ^	[h]	64 64

x = Based on largest single tank volume

^ = Based on discharging tanks one at a time

2.7 UNPUMPABLES

B7	UNPUMPABLES	UNIT	CLIPPER HERMOD
7.1	Unpumpables, liquid		
7.1.1	Tank 1	[m3]	2
7.1.2	Tank 2	[m3]	2
7.1.3	Tank 3	[m3]	2
7.1.4	Tank 4	[m3]	
7.1.5	Total	[m3]	6

2.8 VAPORISING UNPUMPABLES

B8	VAPORISING UNPUMPABLES	UNIT	CLIPPER HERMOD
8.1	Process Used	[Text]	Hot Gas / Puddle heating
8.2	Time to Vaporize Liquid Unpumpables After Discharge:		
8.2.1	Propane	[h]	10
8.2.2	iso-Butane	[h]	12
8.2.3	n-Butane	[h]	12
8.2.4	Ammonia	[h]	12

2.9 RELIQUEFACTION PLANT

B9	RELIQUEFACTION PLANT	UNIT	CLIPPER HERMOD
9.1	Plant Design Conditions		
9.1.1	Air Temperature	[°C]	45
9.1.2	Sea Temperature	[°C]	32
9.2	Plant Type		
9.2.1	Single Stage/Direct	[Yes/No]	YES
9.2.2	Two Stage / Direct	[Yes/No]	YES
9.2.3	Three Stage / Direct	[Yes/No]	NO
9.2.4	Coolant Type	[Text]	Seawarer/R404
9.3	Compressors		
9.3.1	Type	[Text]	Sulzer + Burckhardt
9.3.2	Model	[Text]	2K140-2H
9.3.3	Number	[Psc]	4
9.3.4	Capacity (per unit)	[m3/h]	Varies
9.3.5	Are they oil free?	[Yes/No]	YES

2.11 CARGO TEMP. LOWERING CAPABILITY

B11	CARGO TEMPERATURE LOWERING CAPABILITY	UNIT	CLIPPER HERMOD	CLIPPER HERMOD
11.0	Time taken to lower the temp of:		SW 32 [°C]	SW 20 [°C]
11.1	Propane from ...0 [°C] to -42 [°C]	[h]	435	340
11.2	-37[°C]to -42[°C]	[h]	110	90
11.3	-40[°C] to -42[°C]	[h]	50	40
11.4	Propylene from -5 [°C] to -47[°C]	[h]	420	335
11.5	-10[°C] to -47[°C]	[h]	400	320
11.6	-40[°C] to -47[°C]	[h]	130	105
11.7	Ethane from -84 [°C] to -88[°C]	[h]	80	78
11.8	-86[°C] to -88[°C]	[h]	40	39
11.9	Ethylene from -96[°C] to -103.5[°C]	[h]	170	165
11.10	-100[°C] to -103.5[°C]	[h]	90	88
11.11		[h]		

2.12 INERT GAS

B12	INERT GAS	UNIT	CLIPPER HERMOD
12.1	Main IG Plant		
12.1.1	Type of System	[Text]	Nitrogen Plant – PSA Unit
12.1.2	Capacity	[m3/h]	1380
12.1.3	Type of Fuel Used	[Text]	HFO/MDO
12.1.4	Composition of I.G.		
12.1.5	Max O2	[%]	0.1
12.1.6	Max CO2	[%]	
12.1.7	Max Nox	[%]	
12.1.8	Max N2	[%]	99.9

12.2	Lowest Dewpoint Achievable	[°C]	-50
12.3	Used for	[Text]	Purging cargo tanks
12.4	Auxiliary IG or Nitrogen Plant		N/A
12.4.1	Type of System	[Text]	N/A
12.4.2	Capacity	[m3/h]	N/A
12.5	Lowest Dewpoint Achievable	[°C]	N/A
12.6	Used for	[Text]	N/A
12.7	Nitrogen generator installed?	[Yes/No]	NO
12.7.1	Liquid storage Capacity	[m3]	N/A
12.7.2	Daily Boil-Off Loss	[m3]	N/A
12.7.3	Maximum Supply Pressure	[Bar]	N/A
12.7.4	Supply Capacity	[m3/h]	N/A
12.7.5	Used For	[Text]	N/A
12.7.6	HP Nitrogen	[Nm3]	N/A

2.13 CARGO TANK INERTING/DE-INERTING

B13	CARGO TANK INERTING/DE-INERTING	UNIT	CLIPPER HERMOD
13.1	Time Taken From Fresh Air to Under 5% O2 at -25oC Dewpoint	[h]	36
13.2	Time taken from cargo Vapor to Fully Inert at - 25oC Dewpoint when:		
13.2.1	IG density less than product	[h]	48
13.2.2	IG density greater than product	[h]	48

2.14 GAS FREEING TO FRESH AIR

B14	GAS FREEING TO FRESH AIR	UNIT	CLIPPER HERMOD
14.1	Plant Used	[Text]	PSA/FAN
14.1.1	Number of fans	[Pcs]	1
14.1.2	Total capacity	[m3/h]	2500
14.2	Time taken from Fully Inert Condition to Fully Breathable Air	[h]	24

2.15 CHANGING CARGO GRADES

The table below show the number of hours needed to change grades from the removal of unumpables to tanks fit to load. The quantity of inert gas consumed during the operation is also indicated.

B15	CHANGING CARGO GRADES	UNIT	CLIPPER HERMOD
15.1	From propane to:		[h] [m3]
15.1.1	Iso-butane	[COL]	72 50000
15.1.2	Ammonia	[COL]	102 50000
15.2	From Iso-butane to:		[h] [m3]
15.2.1	Propane	[COL]	84 50000
15.2.2	Ammonia	[COL]	114 50000
15.3	From ammonia to:		[h] [m3]
15.3.1	Propane	[COL]	144 50000
15.3.2	Iso-butane	[COL]	138 50000

2.16 DECK TANK CAPACITIES

B16	DECK TANK CAPACITIES	UNIT	CLIPPER HERMOD
16.1	Deck tank	[Yes/No]	YES
16.2	Deck tank capacities		
16.2.1	1 Propane	[ton]	107
16.2.2	2 Ammonia	[ton]	125
16.2.3	3 Ethylene	[ton]	71
16.3	Maximum Allowable Relief Valve Setting	[bar g]	18
16.4	Lowest Permissible Temperature	[°C]	-104
16.5	Materials	[Text]	NV 5Ni

2.17 PRE-LOADING CONDITIONS

The table below indicates time and quantity of coolant required to cool down cargo tanks from ambient temperature and fully gassed up state sufficient to allow loading to commence.

B17	PRE-LOADING CONDITIONS	UNIT	CLIPPER HERMOD
17.1	Product	Quantity [ton]	VPR [h] W/O VPR [h]
17.1.1	Propane	[COL] 150	4 8
17.1.2	Butane	[COL] 300	4 4
17.1.3	Butadiene	[COL] 200	4 6
17.1.4	Propylene	[COL] 150	6 8
17.1.5	Ammonia	[COL]	
17.1.6	VCM	[COL]	

2.18 VAPORISER

B18	VAPORISER	UNIT	CLIPPER HERMOD
18.1	Type of Vaporizer	[Text]	Shell and tube
18.2	Number Fitted	[Pcs]	3
18.3	Capacity (per unit) – Propane	[Nm3/h]	2100
18.3.1	Liquid Supply rate	[m3/h]	7,8
18.3.2	Delivery temperature	[°C]	
18.4	Capacity (per unit) – Ammonia	[Nm3/h]	2100
18.4.1	Liquid Supply rate	[m3/h]	7,8
18.4.2	Delivery temperature	[°C]	
18.5	Capacity (per unit) – Ethylene [-50°C]	[Nm3/h]	1600
18.5.1	Liquid Supply rate	[m3/h]	
18.5.2	Delivery temperature	[°C]	-50

2.19 BLOWER

B19	BLOWER	UNIT	CLIPPER HERMOD
19.1	Type of Blower	[Text]	High pressure centrifugal fan
19.2	Number fitted	[Pcs]	1
19.3	Rated Capacity (per unit)	[Nm3/h]	12000
19.4	Delivery Pressure	[Bar]	0.3

2.20 CARGO RE-HEATER

Cargo re-heater capacities are given in the appendix.

B20	CARGO RE-HEATER	UNIT	CLIPPER HERMOD
20.1	Type of re-heater	[Text]	LPG; Plate
20.2	Number Fitted	[Pcs]	2
20.3	Heating Medium	[Medium]	Seawater/Water-Glycol
20.4	Discharge rates, SW = 15[°C], to raise product temperature:		
20.4.1	Propane from -42[°C] to 0[°C]	[ton/h]	175
20.4.2	Ammonia from -33[°C] to 0[°C]	[ton/h]	136
20.5	Cargo Heater Curve:	[Yes/No]	YES

2.21 HYDRATE CONTROL

B21	HYDRATE CONTROL	UNIT	CLIPPER HERMOD
21.1	Type of Depressant	[Medium]	Ethanol
21.2	Depressant Freezing Point Temperature	[°C]	-114
21.3	Max capacity of depressant	[Liter]	200
21.4	Means of Injection	[Text]	Hand pump
21.5	Any other system used	[Text]	Hot gas

2.22 CARGO MEASUREMENT


B22	CARGO MEASUREMENT	UNIT	CLIPPER HERMOD
22.1	Level Gauges		
22.1.1	Are level gauges Local or Remote	[Text]	Both
22.1.2	Manufacturer	[Text]	HEINI SYSTEMS
22.1.3	Type	[Text]	Float
22.1.4	Rated Accuracy	[-]	± 5 mm
22.1.5	Certifying Authority	[Text]	DNV
22.2	Temperature Transmitter		
22.2.1	Manufacturer	[Text]	WIKA
22.2.2	Type	[Text]	Bimetal
22.2.3	Rated Accuracy	[-]	±0.3oC
22.2.4	Certifying Authority	[Text]	DNV
22.3	Pressure Transmitter		
22.3.1	Manufacturer	[Text]	WIKA
22.3.2	Type	[Text]	Bourdon
22.3.3	Rated Accuracy	[-]	±0.01 bar g
22.3.4	Certifying Authority	[Text]	DNV
22.4	Oxygen Analyzer		
22.4.1	Manufacturer	[Text]	Riken
22.4.2	Type	[Text]	OX-227A / GX-2001A
22.4.3	Lowest Level Measurable		
22.5	Fixed Gas Analyzer		
22.5.1	Manufacturer	[Text]	OMICRON
22.5.2	Type	[Text]	OGS 3.1
22.6	Cargo Tank Calibration Tables		
22.6.1	Are Cargo Tank Calibration tables available	[Yes/No]	YES
22.6.2	Measuring Company	[Text]	BSH, Germany
22.6.3	Certifying Authority	[Text]	BSH, Germany
22.6.4	Calibration calculated tocm ½ cm.....	[Yes/No]	YES

22.6.5	Tables established tocmcm.....mm	[Yes/No]	mm
22.6.6	Trim and List corrections Available	[YES/NO]	YES
22.6.7	Temperature Corrections available	[YES/NO]	YES
22.6.8	Float Gauge Tape Corrections Available	[YES/NO]	YES

2.23 CARGO SAMPLING

B23	CARGO SAMPLING	UNIT	CLIPPER HERMOD			
23.1	Cargo tank sample level	[Tank]	1	2	3	4
23.1.1	Top	[Yes/No]	Yes	Yes	Yes	
23.1.2	Middle	[Yes/No]	Yes	Yes	Yes	
23.1.3	Bottom	[Yes/No]	Yes	Yes	Yes	
23.2	Can sample be drawn from?					
23.2.1	Tank Vapor Outlet	[Yes/No]	YES			
23.2.2	Manifold Liquid Line	[Yes/No]	YES			
23.2.3	Manifold Vapor Line	[Yes/No]	YES			
23.2.4	Pump Discharge Line	[Yes/No]	YES			
23.3	State connection					
23.3.1	Type	[Text]	Female, double-valve			
23.3.2	Size	[Inch]	0.5			

2.24 CARGO MANIFOLD

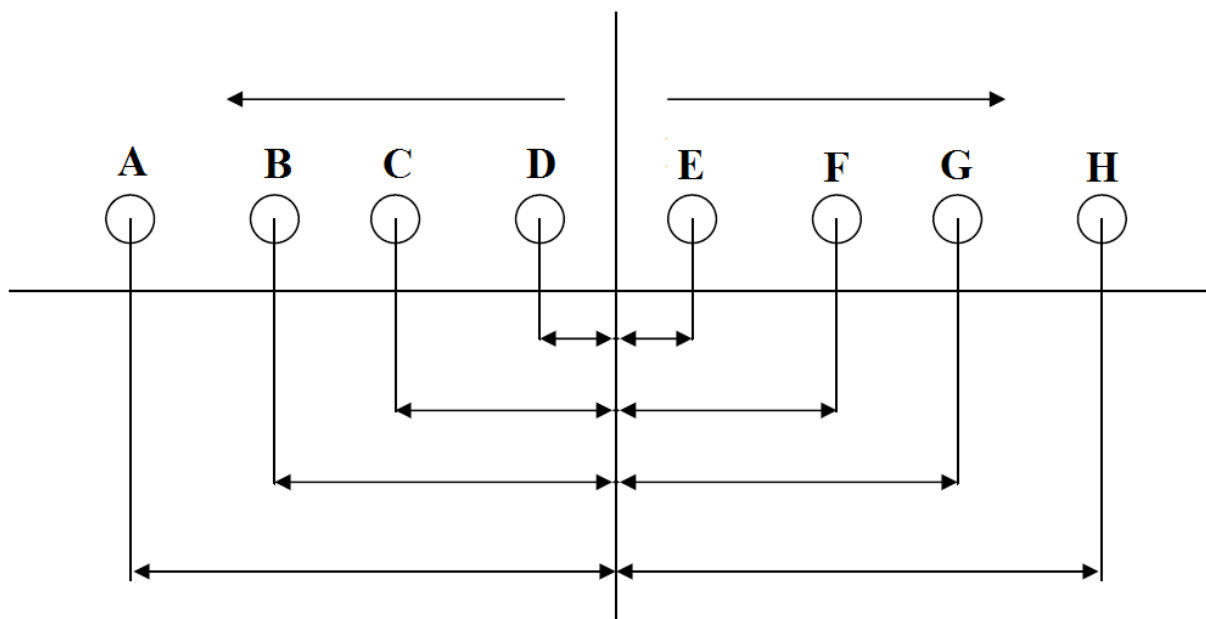

B24	CARGO MANIFOLD	UNIT	CLIPPER HERMOD			
24.1	Distance from center of manifold to:					
24.1.1	Stern	[m]	80.2			
24.1.2	Bow	[m]	74.75			
24.1.3	A	[mm]				
24.1.4	B	[mm]				
24.1.5	C	[mm]	2500			
24.1.6	D	[mm]	1000			
24.1.7	E	[mm]	1000			
24.1.8	F	[mm]	2500			
24.1.9	G	[mm]	4900			
24.1.10	H	[mm]	5250			
24.2	Flange		Duty [Bar]	ASA	Size ["]	[R]aised/[F]lat
24.2.1	A	[COL]				
24.2.2	B	[COL]				
24.2.3	C	[COL]	Cargo Liquid	300	10	R
24.2.4	D	[COL]	Cargo Vapor	300	6	R
24.2.5	E	[COL]	Cargo Vapor	300	6	R
24.2.6	F	[COL]	Cargo Liquid	300	8	R
24.2.7	G	[COL]	Fuel Oil	150	6	R
24.2.8	H	[COL]	Gas Oil	150	4	R
24.3	Height above uppermost continuous deck	[mm]	2200			
24.4	Distance from ship side	[mm]	3600			
24.5	Height above load waterline	[mm]	6400			
24.6	Height above light waterline	[mm]	11400			

2.25 CARGO REDUCERS

B25	CARGO REDUCERS	CLIPPER HERMOD
25.0	ANSI 300	ANSI 300 -150
25.1	1 off 12"NB 300# ' 10"NB 300#	1 off 10"NB 300# ' 12"NB 150#
25.2	1 off 10"NB 300# ' 8"NB 300#	1 off 10"NB 300# ' 10"NB 150#
25.3	1 off 8"NB 300# ' 6"NB 300#	1 off 10"NB 300# ' 8"NB 150#
25.4	1 off 6"NB 300# ' 4"NB 300#	1 off 8"NB 300# ' 10"NB 150#
25.5	1 off 6"NB 300# ' 3"NB 300#	1 off 8"NB 300# ' 8"NB 150#
25.6		1 off 8"NB 300# ' 6"NB 150#
25.7		1 off 6"NB 300# ' 8"NB 150#
25.8		1 off 6"NB 300# ' 6"NB 150#
25.9		1 off 6"NB 300# ' 4"NB 150#
25.0	ANSI 150	FUEL
25.1		
25.2		
25.3		
25.4		
25.5		
25.6		
25.7		
25.8		
25.9		

2.26 CONNECTION TO SHORE FOR ESD/COM SYSTEMS

B26	CONNECTIONS TO SHORE FOR ESD AND COM. SYSTEMS	UNIT	CLIPPER HERMOD
26.1	Is ESD connection to Shore available?	[Yes/No]	YES
26.1.1	System	[Text]	Fiber optic
26.1.2	Type of plug	[Text]	Eletrical
26.3	Is Hose or cables Available on Board	[Yes/No]	YES
26.3.1	Specify Length	[m]	22
26.3.2	Specify type	[Text]	Eletrical

2.27 MANIFOLD DERRICK/CRANE

B27	MANIFOLD DERRICK/CRANE	UNIT	CLIPPER HERMOD
27.1	Is Manifold Derrick Provided?	[Yes/No]	NO
27.2	Is Manifold Crane Provided?	[Yes/No]	YES
27.3	Is Lifting equipment Same P&SB?	[Yes/No]	NO
27.3.1	If NO, give details	[Text]	Center
27.3.2	Maximum outreach	[m]	17
27.3.3	Capacity at max. Outreach	[ton]	5

2.28 STORES HANDLING

B28	STORES HANDLING	UNIT	CLIPPER HERMOD
28.1	Number of cranes	[Pcs]	1
28.1.1	Location(s)	[Text]	Starboard

3. SECTION C – Machinery

3.11 NOX FACTOR TIER II

C1.1	NOx factor	UNIT	CLIPPER HERMOD
1.1.1.0	Main engine		Tier II
1.1.1.1	Power	[kW]	9720
1.1.1.2	RPM	[RPM]	124
1.1.1.3	NOx limit	[g/kWh]	17
1.1.1.4	NOx factor	[g/kWh]	13.9
1.1.1.5	EIAPP	[Ref]	EIAPP-358-6-B
1.1.1.6	Issued	[Date]	25.05.2011
1.1.2.0	Auxiliary engine 1		Tier II
1.1.2.1	Power	[kW]	1025
1.1.2.2	RPM	[RPM]	900
1.1.2.3	NOx limit	[g/kWh]	11.5
1.1.2.4	NOx factor	[g/kWh]	10.5
1.1.2.5	EIAPP	[Ref]	EIAPP-246-174-A
1.1.2.6	Issued	[Date]	08.07.2008
1.1.3.0	Auxiliary engine 2		Tier II
1.1.3.1	Power	[kW]	1025
1.1.3.2	RPM	[RPM]	900
1.1.3.3	NOx limit	[g/kWh]	11.5
1.1.3.4	NOx factor	[g/kWh]	10.5
1.1.3.5	EIAPP	[Ref]	EIAPP-246-175-A
1.1.3.6	Issued	[Date]	08.07.2008
1.1.4.0	Auxiliary engine 3		Tier II
1.1.4.1	Power	[kW]	1025
1.1.4.2	RPM	[RPM]	900
1.1.4.3	NOx limit	[g/kWh]	11.5
1.1.4.4	NOx factor	[g/kWh]	10.5
1.1.4.5	EIAPP	[Ref]	EIAPP-246-176-A
1.1.4.6	Issued	[Date]	08.07.2008
1.1.5.0	Auxiliary engine 4		Tier II
1.1.5.1	Power	[kW]	
1.1.5.2	RPM	[RPM]	
1.1.5.3	NOx limit	[g/kWh]	
1.1.5.4	NOx factor	[g/kWh]	
1.1.5.5	EIAPP	[Ref]	
1.1.5.6	Issued	[Date]	

3.12 NOX FACTOR TIER III

C1.2	NOx factor	UNIT	CLIPPER HERMOD
1.2.1.0	Main engine		Tier III
1.2.1.1	Power	[kW]	0
1.2.1.2	RPM	[RPM]	0
1.2.1.3	NOx limit	[g/kWh]	0
1.2.1.4	NOx factor	[g/kWh]	0
1.2.1.5	EIAPP	[Ref]	0
1.2.1.6	Issued	[Date]	00.01.1900
1.2.2.0	Auxiliary engine 1		Tier III
1.2.2.1	Power	[kW]	0
1.2.2.2	RPM	[RPM]	0
1.2.2.3	NOx limit	[g/kWh]	0
1.2.2.4	NOx factor	[g/kWh]	0
1.2.2.5	EIAPP	[Ref]	0
1.2.2.6	Issued	[Date]	00.01.1900
1.2.3.0	Auxiliary engine 2		Tier III
1.2.3.1	Power	[kW]	0
1.2.3.2	RPM	[RPM]	0
1.2.3.3	NOx limit	[g/kWh]	0
1.2.3.4	NOx factor	[g/kWh]	0
1.2.3.5	EIAPP	[Ref]	0
1.2.3.6	Issued	[Date]	00.01.1900
1.2.4.0	Auxiliary engine 3		Tier III
1.2.4.1	Power	[kW]	0
1.2.4.2	RPM	[RPM]	0
1.2.4.3	NOx limit	[g/kWh]	0
1.2.4.4	NOx factor	[g/kWh]	0
1.2.4.5	EIAPP	[Ref]	0
1.2.4.6	Issued	[Date]	00.01.1900
1.2.5.0	Auxiliary engine 4		Tier III
1.2.5.1	Power	[kW]	
1.2.5.2	RPM	[RPM]	
1.2.5.3	NOx limit	[g/kWh]	
1.2.5.4	NOx factor	[g/kWh]	
1.2.5.5	EIAPP	[Ref]	
1.2.5.6	Issued	[Date]	

3.13 EGCS/SCRUBBER

C2	EGCS/SCRUBBER	UNIT	CLIPPER HERMOD
2.1.0	Main engine		
2.1.1	Scrubber installed	[Yes/No]	NO
2.1.2	Maker	[Text]	N/A
2.1.3	Type	[Text]	N/A
2.1.4	VGP compliant	[Yes/No]	N/A
2.2.0	Auxiliary engines		
2.2.1	Scrubber installed	[Yes/No]	NO
2.2.2	Maker	[Text]	N/A
2.2.3	Type	[Text]	N/A
2.2.4	VGP compliant	[Yes/No]	N/A
2.3.0	Tank capacity closed loop		
2.3.1	NaOH tank	[Days]	N/A
2.3.2	NaOH tank	[m ³]	N/A
2.3.3	Sludge tank	[Days]	N/A
2.3.4	Sludge tank	[m ³]	N/A
2.3.5	Scrubbing water holding tank	[Days]	N/A
2.3.6	Scrubbing water holding tank	[m ³]	N/A

3.14 HEAT RECOVERY

C3	HEAT RECOVERY	UNIT	CLIPPER HERMOD
3.1.0	Main engine		
3.1.1	Economizer installed	[Yes/No]	YES
3.1.2	Type	[Text]	0
3.1.3	Capacity	[kW]	0
3.1.4	Auxiliary engines		
3.1.5	Economizer installed	[Yes/No]	NO
3.1.6	Type	[Text]	0
3.1.7	Capacity	[kW]	0

3.15 OTHER RELEVANT TECHNICAL INFORMATION


C4	OTHER RELEVANT TECHNICAL INFORMATION	UNIT	CLIPPER HERMOD
4.0	Rudder type	[Text]	Becker rudder
4.0.1	Number of rudders	[Pcs]	1
4.1	Type of propeller	[Text]	CPP
4.1.1	Blades	[Pcs]	4
4.2	Mewis Duct	[Yes/No]	NO
4.3	Ballast Water Treatment System	[Yes/No]	YES
4.3.1	Type	[Text]	Optimarin
4.4	Oily Water Separator	[Yes/No]	YES
4.4.1	Type	[Text]	0
4.4.2	Concentration	[ppm]	0

3.16 ENVIRONMENTAL/PERFORMANCE TECHNOLOGIES INSTALLED


CODE	C5 ENVIRONMENTAL/PERFORMANCE TECHNOLOGIES INSTALLED	UNIT	CLIPPER HERMOD
5.0	EEDI (Energy Efficiency Design Index)	[-]	13.07
5.1	ESI (Environmental Ship Index)	[-]	15.29
5.2	Electronic Vessel Performance Monitoring	[Yes/No]	YES
5.3	Selective Catalytic Reduction	[Yes/No]	No
5.3.1	Urea Storage Tank Capacity	[Days]	N/A
5.3.2	Urea Storage Tank Capacity	[m ³]	N/A
5.4	Trim optimization tests	[Yes/No]	No
5.5	Antifouling	[Text]	Intercept 8500 LPP

4. APPENDIX/DRAWINGS

4.11 CARGO PUMPS

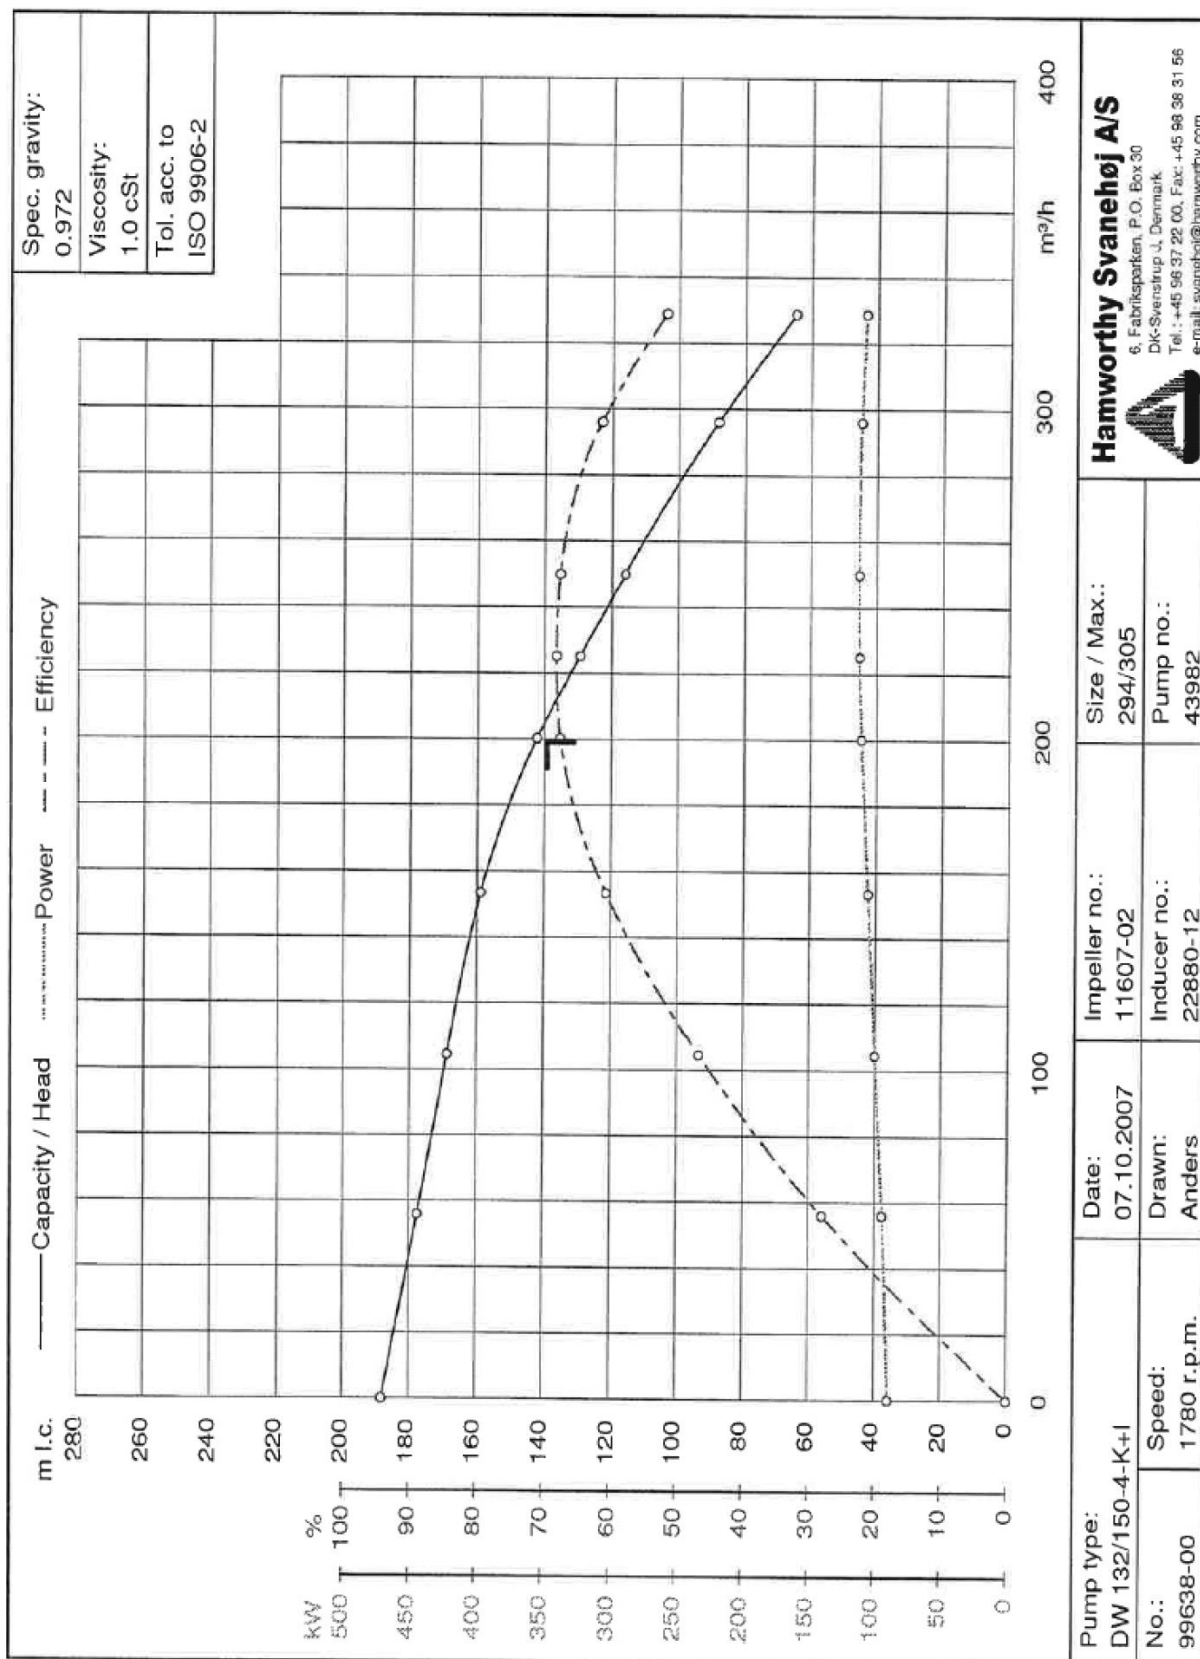

4.12 BOOSTER PUMPS

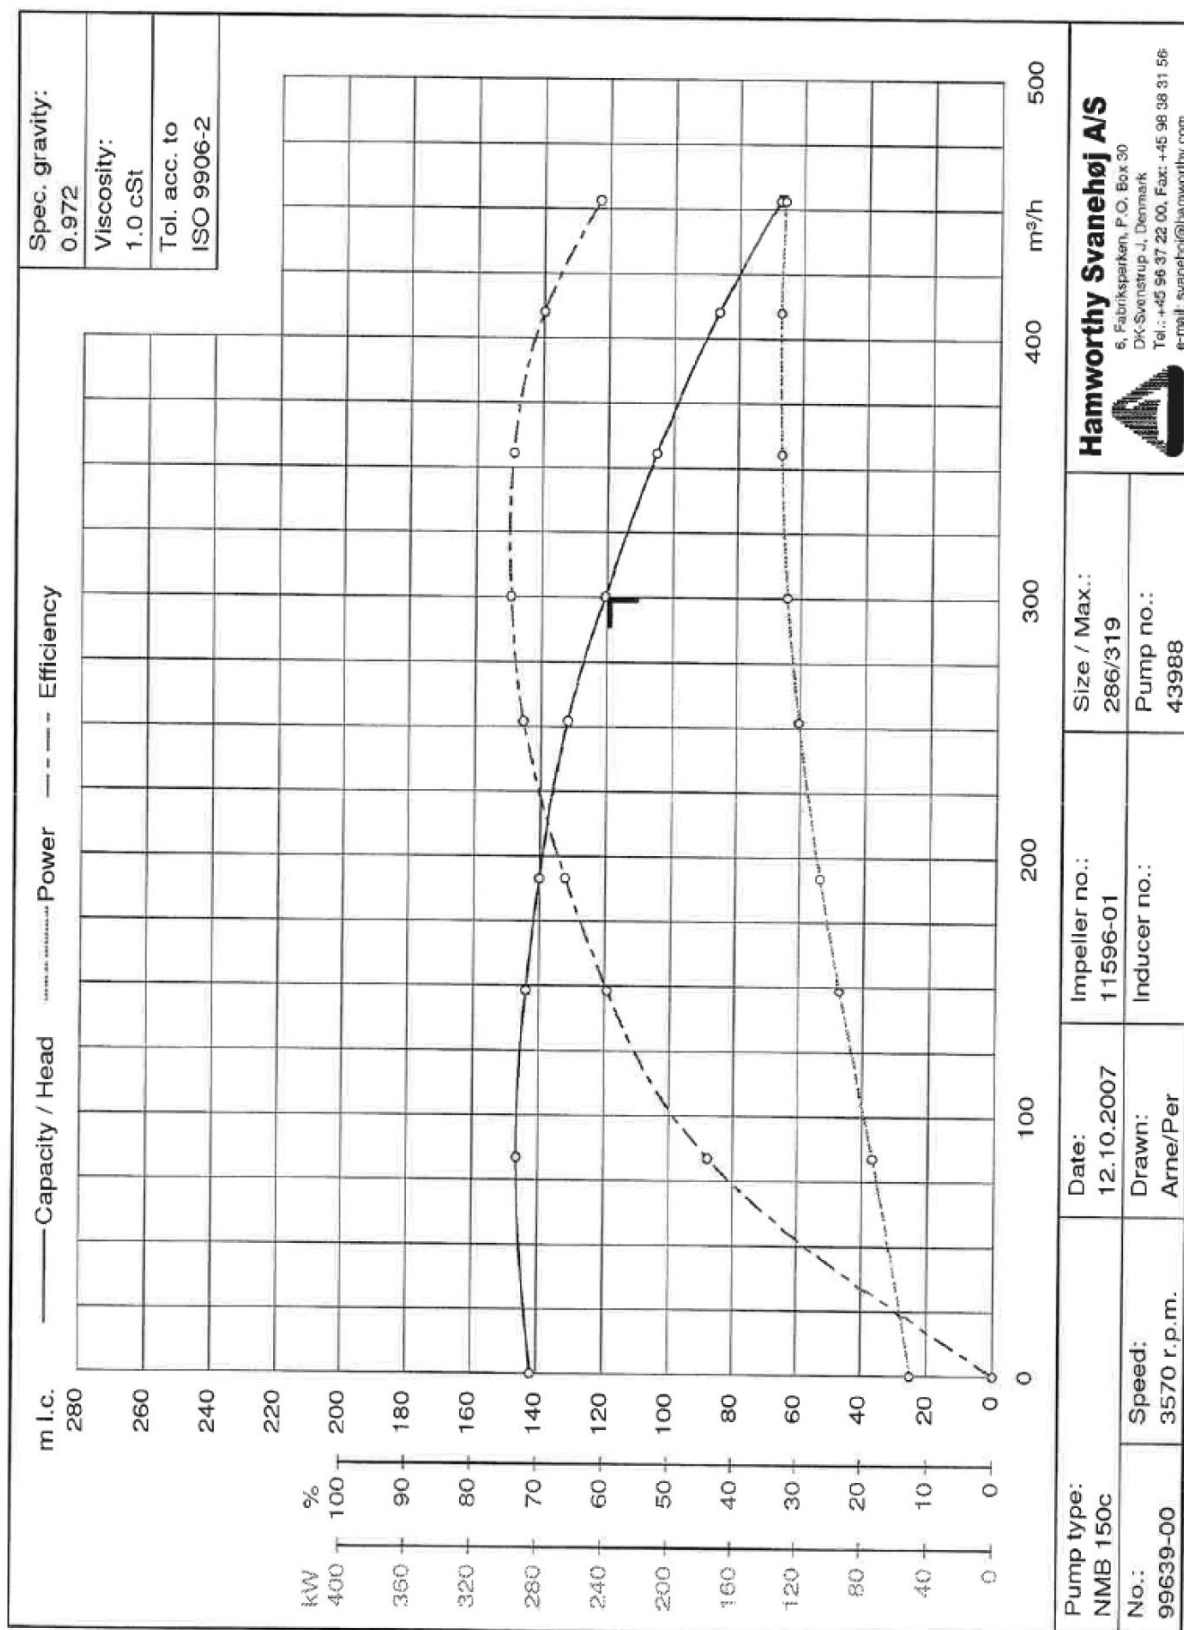

4.13 RE-HEATER CAPACITY, AMMONIA

4.14 RE-HEATER CAPACITY, PROPANE
